

# Tri-Creaser Fast-Fit Advance System

Fast-Fit Tri-Creaser with Advance Female to fit GUK 35mm exit shaft

Stock Code: **FF-GU/35-FP-DSF-01-B**

Shaft Size: **35mm Exit Shaft**  
Outer Diameter: **59.4mm**

## SETTINGS



### Additional Information

Compatible with:


SM 50/2      FA 50

SM 54/4      FA 74

SM 74/4

### How it works...

Instead of the traditional metal receiving grooves in the previous Tri-Creaser Fast-Fit, the nylon Female Receiver Rings are fitted with a special profile designed to apply a double-reverse crease either side of the male creasing rib.

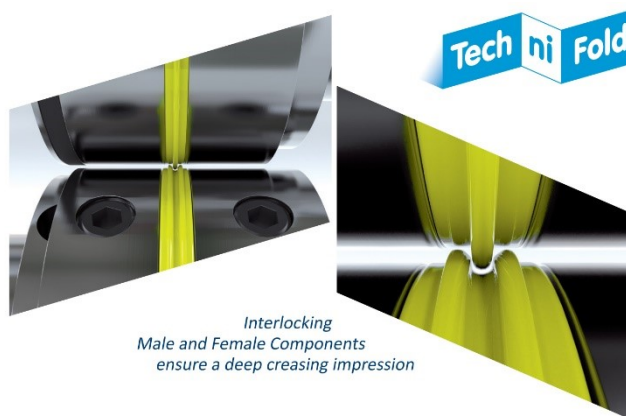

### Optional Items

If fibre-cracking is not a problem these deep and penetrating nylon ribs are ideal for laminated and section work:

**FF-PC-GU/35-R**      Red light crease  
**FF-PC-GU/35-B**      Blue medium crease  
**FF-PC-GU/35-Y**      Yellow heavy crease

**White Very Narrow Female Receiver Ring (FF-DSF/GU-35-NY-W):**

used to crease material weights between 60-200gsm

## Contents of Package

1x **Male Creasing Rib Holder Component (M):**  
contains the split gripper crease ribs

1x **Orange Split Gripper Crease (M-114B-XTRA):**  
used to crease material weight between 85-150gsm

1x **Blue Split Gripper Crease (M-113B-XTRA):**  
used to crease material weight between 150-250gsm

1x **Yellow Split Gripper Crease (M-104B-XTRA):**  
used to crease material weight between 250-350gsm

1x **Extraction Tool:**  
used to remove the inserts from Male Component

1x **Black Gripper Band (M-15):**  
used to support and feed sheet through the device

1x **Female Receiver Holder Component (F):**  
holds receiver rings in which material is pressed

1x **Red Female Receiver Ring (FF-DSF/GU-35-NY-R):**  
used to crease material weights between 85-150gsm

1x **Blue Female Receiver Ring (FF-DSF/GU-35-NY-B):**  
used to crease material weights between 150-250gsm

1x **Yellow Receiver Ring (FF-DSF/GU-35-NY-Y):**  
used to crease material weights between 250-350gsm



Tech 146M / Tech 496